




Gaskets, Inc.
301 W. Hwy. 16
Rio, WI 53960-0398
800-558-1833
FAX 920-992-3124
www.gasketsinc.com
info@gasketsinc.com

Product Data Sheet — GT23S

Tadpole Types: 1, 2, 3, 8, & 9

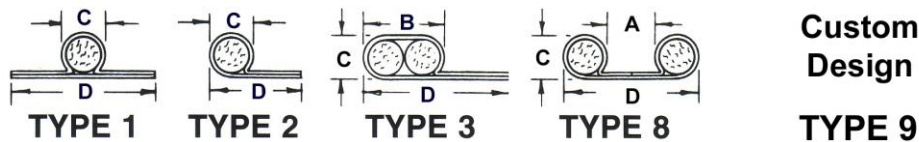

Description:	High-Performance Vermiculite impregnated fiberglass tadpole seal with 304 Stainless Solid Mesh Core.
Size:	Standard and custom sizes available. See Tadpole Types and potential sizes listed above.
Cover:	1/16" thick premium quality Vermiculite impregnated woven fiberglass tape and cloth tan in color.
Core:	304 Stainless steel Solid Mesh Core.
Temperature:	1200° F / 649° C
Application:	Tadpole seals are used in sealing oven doors, covers, ducts, dampers, panel joints and other applications where conformance to uneven flanges is required.
Chemical Resistance:	Fiberglass textiles impregnated with Vermiculite and stainless steel have excellent resistance to most chemicals. Please call Gaskets Incorporated for specific application concerns.
Other:	Adding Vermiculite to our premium fiberglass increases the temperature resistance and tensile strength. It makes for a tadpole cover with higher abrasion resistance and a 20% higher maximum service temperature than untreated fiberglass. Vermiculite impregnated fiberglass and stainless steel have excellent mechanical properties. They are resilient, have excellent resistance to thermal shock, vibration, and to most chemicals. They are used in a variety of industrial applications requiring superior temperature and insulation performance.