




Gaskets, Inc.
301 W. Hwy. 16
Rio, WI 53960-0398
800-558-1833
FAX 920-992-3124
www.gasketsinc.com
info@gasketsinc.com

Product Data Sheet — GT11C

Tadpole Types: 1, 2, 3, 8, & 9

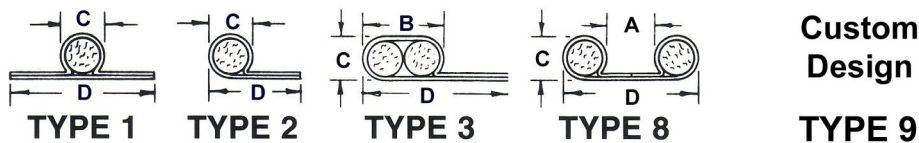

Description:	Fiberglass tadpole seal
Size:	Standard and custom sizes available. See Tadpole Types and potential sizes listed above.
Cover:	1/16" Thick Premium quality heat-treated woven Fiberglass Tape.
Core:	304 Stainless steel hollow-core
Temperature:	1000° F /538° C
Application:	Tadpole seals are used in sealing oven doors, covers, ducts, dampers, panel joints and other applications where conformance to uneven flanges is required.
Chemical Resistance:	Fiberglass textiles and stainless steel have excellent resistance to most chemicals. Please call Gaskets Incorporated for specific application concerns.
Other:	Fiberglass and stainless steel have excellent mechanical properties. They are resilient, have excellent resistance to thermal shock, vibration, and to most chemicals. They are used in a variety of industrial applications requiring superior temperature and insulation performance.