




**Gaskets, Inc.**  
301 W. Hwy. 16  
Rio, WI 53960-0398  
**800-558-1833**  
FAX 920-992-3124  
www.gasketsinc.com  
info@gasketsinc.com

---

## Product Data Sheet — GT10C

### Tadpole Types: 1, 2, 3, 8, & 9

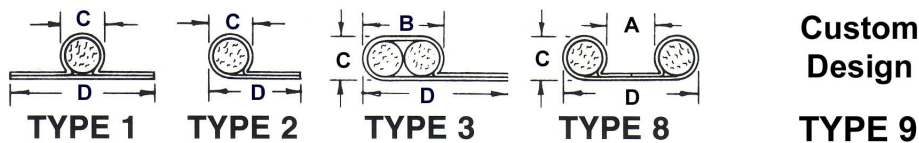

<b>Description:</b>	Aluminum Foil on Fiberglass Tadpole seal
<b>Size:</b>	Standard and custom sizes available. See Tadpole Types and potential sizes listed above.
<b>Cover:</b>	1/32" Thick Aluminum Foil laminated to one side of woven Fiberglass Fabric with a special high-temperature adhesive.
<b>Core:</b>	304 Stainless steel hollow mesh
<b>Temperature:</b>	500° F /260° C
<b>Application:</b>	Tadpole seals are used in sealing oven doors, covers, ducts, dampers, panel joints and other applications where conformance to uneven flanges is required.
<b>Chemical Resistance:</b>	Fiberglass textiles, aluminum and Stainless steel have excellent resistance to most chemicals. Please call Gaskets Incorporated for specific application concerns.
<b>Other:</b>	Aluminized Fiberglass and Stainless steel have excellent mechanical properties. They are resilient, have superior resistance to thermal shock, vibration, and to most chemicals. They are used in a variety of industrial applications requiring high temperature and insulation performance.