




Gaskets, Inc.
301 W. Hwy. 16
Rio, WI 53960-0398
800-558-1833
FAX 920-992-3124
www.gasketsinc.com
info@gasketsinc.com

Product Data Sheet

Style	GT131 — 5/16" x 13/16" (± 0.039 ") Gray
Description	Silicone "P" Seal with hollow core
Material	General Purpose 45 durometer Commercial Grade Silicone
Service Temperature	500° (-65°) F/260° (-54 °) C
Application	Excellent choice for sealing doors and dampers under operating conditions with extremely low or high temperatures. Easily cleaned because of smooth non-absorbent surface.
Chemical Resistance	Silicone is resistant to many acids and chemicals except Benzene, Carbon Tetrachloride Chlorine, Petroleum Products, Paint Thinners and Lacquers (for specific product application information contact manufacturer).



Gaskets, Inc.
301 W. Hwy. 16
Rio, WI 53960-0398
800-558-1833
FAX 920-992-3124
www.gasketsinc.com
info@gasketsinc.com

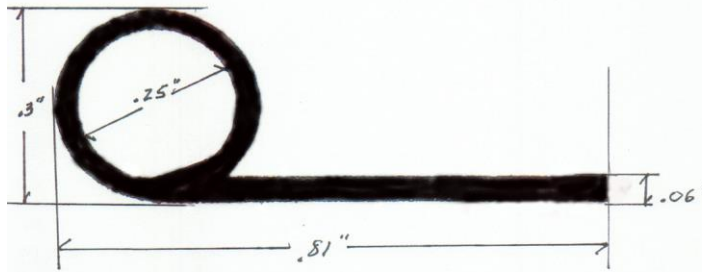

GT131 Extruded Silicone "P" Seal
5/16" x 13/16"
±0.039"

3/14