




**Gaskets, Inc.**  
301 W. Hwy. 16  
Rio, WI 53960-0398  
**800-558-1833**  
FAX 920-992-3124  
www.gasketsinc.com  
info@gasketsinc.com

## Product Data Sheet – GT15M

### Tadpole Types: 1, 2, 3, 8, & 9

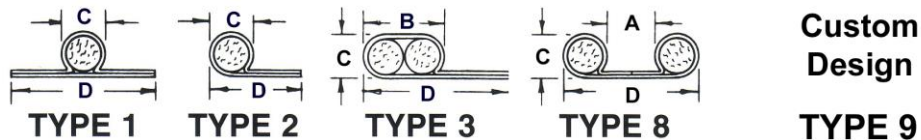

**Description:**

*Kevlar®/Aramid tadpole seal with  
Fiberglass rope core*

**Size:**

*Standard and custom sizes available. See  
Tadpole Types and potential sizes listed  
above.*

**Cover:**

*1/16" Thick Premium quality woven  
Kevlar®/Aramid Tape.*

**Core:**

*Fiberglass Rope*

**Temperature:**

*500° - (320°) F / 216° - (196°) C*

**Application:**

*Tadpole seals are used in sealing oven doors, covers,  
ducts, dampers, panel joints and other applications  
where conformance to uneven flanges is required.*



**Gaskets, Inc.**  
301 W. Hwy. 16  
Rio, WI 53960-0398  
**800-558-1833**  
FAX 920-992-3124  
www.gasketsinc.com  
info@gasketsinc.com

*Chemical Resistance:*

*Kevlar®/Aramid* textiles have excellent resistance to most chemicals. Please call Gaskets Incorporated for specific application concerns.

*Other:*

*Kevlar®/Aramid* has excellent mechanical properties being resilient with excellent resistance to thermal shock and vibration. It is used in a variety of industrial and aerospace applications requiring superior temperature and insulation performance. It is uniquely suited for cryogenic use because of its strength in spite of extreme cold conditions.