




**Gaskets, Inc.**  
301 W. Hwy. 16  
Rio, WI 53960-0398  
**800-558-1833**  
FAX 920-992-3124  
www.gasketsinc.com  
info@gasketsinc.com

## Product Data Sheet — GT20D

### Tadpole Types: 1, 2, 3, 8, & 9

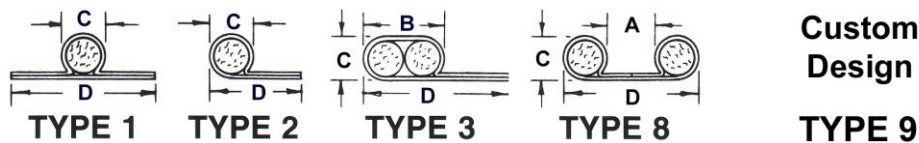

<b>Description:</b>	High-Performance Coated Fiberglass tadpole seal Blue in color with 601 Inconel® Solid Mesh Core.
<b>Size:</b>	Standard and custom sizes available. See Tadpole Types and potential sizes listed above.
<b>Cover:</b>	1/16" thick premium quality coated woven fiberglass tape blue in color.
<b>Core:</b>	601 Inconel® Solid Mesh Core.
<b>Temperature:</b>	1200° F / 649° C
<b>Application:</b>	Tadpole seals are used in sealing oven doors, covers, ducts, dampers, panel joints and other applications where conformance to uneven flanges is required.
<b>Chemical Resistance:</b>	Fiberglass textiles and Inconel® steel have excellent resistance to most chemicals. Please call Gaskets Incorporated for specific application concerns.
<b>Other:</b>	Coated Fiberglass increases the temperature resistance over that of uncoated fiberglass textile products. Tensile abrasion resistance strength and Inconel® Solid Mesh Core also have excellent mechanical properties. They are resilient, have excellent resistance to thermal shock, vibration, and to most chemicals. They are used in a variety of industrial applications requiring superior temperature and insulation performance.