




Gaskets, Inc.
301 W. Hwy. 16
Rio, WI 53960-0398
800-558-1833
FAX 920-992-3124
www.gasketsinc.com
info@gasketsinc.com

Product Data Sheet — GT20M

Tadpole Types: 1, 2, 3, 8, & 9

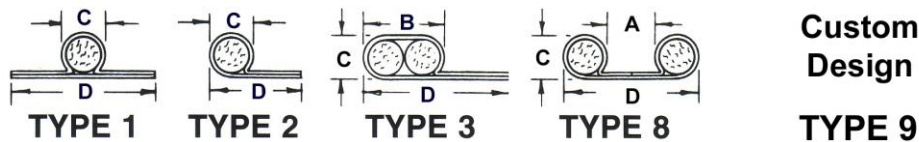

Description:	High-Performance Coated Fiberglass tadpole seal with Fiberglass rope core.
Size:	Standard and custom sizes available. See Tadpole Types and potential sizes listed above.
Cover:	1/16" thick premium quality Vermiculite coated woven fiberglass tape and cloth blue in color.
Core:	Medium density braided fiberglass core.
Temperature:	1200° F / 649° C
Application:	Tadpole seals are used in sealing oven doors, covers, ducts, dampers, panel joints and other applications where conformance to uneven flanges is required.
Chemical Resistance:	Vermiculite coated fiberglass textiles and fiberglass rope have excellent resistance to most chemicals. Please call Gaskets Incorporated for specific application concerns.
Other:	Vermiculite Coated Fiberglass increases the temperature resistance over that of uncoated fiberglass textile products. They have high tensile strength and are abrasion resistant with excellent mechanical properties. They are resilient, have excellent resistance to thermal shock, vibration, and to most chemicals. They are used in a variety of industrial applications requiring superior temperature and insulation performance.