




**Gaskets, Inc.**  
301 W. Hwy. 16  
Rio, WI 53960-0398  
**800-558-1833**  
FAX 920-992-3124  
www.gasketsinc.com  
info@gasketsinc.com

---

## Product Data Sheet — GT11D

### Tadpole Types: 1, 2, 3, 8, & 9

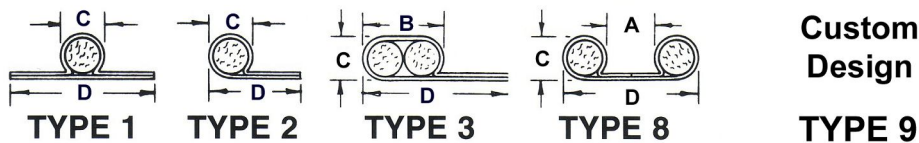

|                             |  |
|-----------------------------|--|
| <b>Description:</b>         | Fiberglass tadpole seal  |
| <b>Size:</b>                | Standard and custom sizes available. See Tadpole Types and potential sizes listed above.   |
| <b>Cover:</b>               | 1/16" Thick Premium quality heat-treated woven Fiberglass Tape.  |
| <b>Core:</b>                | Inconel® Wire Mesh   |
| <b>Temperature:</b>         | 1000° F /538° C  |
| <b>Application:</b>         | Tadpole seals are used in sealing oven doors, covers, ducts, dampers, panel joints and other applications where conformance to uneven flanges is required.   |
| <b>Chemical Resistance:</b> | Fiberglass textiles and stainless steel have excellent resistance to most chemicals. Please call Gaskets Incorporated for specific application concerns.   |
| <b>Other:</b>               | Fiberglass and Inconel® steel have excellent mechanical properties. They are resilient, have excellent resistance to thermal shock, vibration, and to most chemicals. They are used in a variety of industrial applications requiring superior temperature and insulation performance. |