




Gaskets, Inc.
301 W. Hwy. 16
Rio, WI 53960-0398
800-558-1833
FAX 920-992-3124
www.gasketsinc.com
info@gasketsinc.com

Product Data Sheet — GT14C

Tadpole Types: 1, 2, 3, 8, & 9

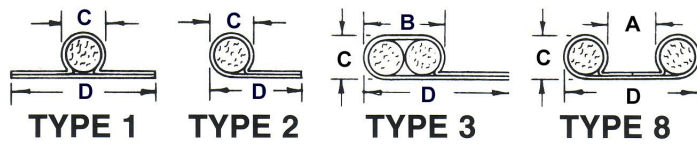

**Custom
Design**

TYPE 9

Description:	Silicone Coated Fiberglass/Hollow Core Stainless Steel tadpole seal
Size:	Standard and custom sizes available. See above Tadpole Types and dimensional requirements (A, B, C, & D) for standard and/or custom sizes.
Cover:	0.02" Thick Premium quality Silicone coated fiberglass tape. Orange-red in color.
Core:	Hollow Core 304 Stainless Steel
Temperature:	500°(-150°) F/216°(-101°) C
Application:	Tadpole seals are used in sealing oven doors, covers, ducts, dampers, panel joints and other applications where conformance to uneven flanges is required.
Chemical Resistance:	Silicone rubber offers exceptional performance in adverse environments. It is reliable under many conditions that cause organic rubber to fail or deteriorate prematurely. Chemically, silicones are quite different from all other rubber like materials.
Other:	Has excellent mechanical properties with excellent resistance to thermal shock and vibration. It is used in a variety of applications requiring superior temperature and insulation performance.