




**Gaskets, Inc.**  
301 W. Hwy. 16  
Rio, WI 53960-0398  
**800-558-1833**  
FAX 920-992-3124  
www.gasketsinc.com  
info@gasketsinc.com

## Product Data Sheet — GT29S

### Tadpole Types: 1, 2, 3, 8, & 9

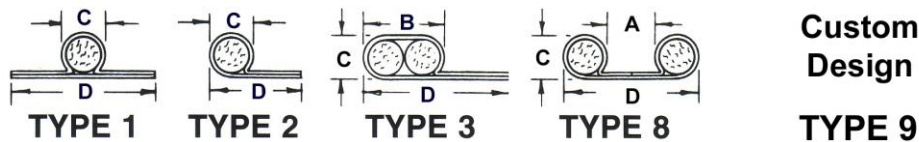

<b>Description:</b>	Basalt Woven Fiber tadpole seal with 304 Stainless steel solid mesh core.
<b>Size:</b>	Standard and custom sizes available. See Tadpole Types and potential sizes listed above.
<b>Cover:</b>	1/16" thick premium quality Basalt woven tape.
<b>Core:</b>	304 Stainless steel solid mesh
<b>Temperature:</b>	1200° F / 649° C (continuous) 1400° F/760° C (intermittent)
<b>Application:</b>	Tadpole seals are used in sealing oven doors, covers, ducts, dampers, panel joints and other applications where conformance to uneven flanges is required.
<b>Chemical Resistance:</b>	Basalt textiles and 304 Stainless steel solid mesh core have excellent resistance to most chemicals. Please call Gaskets Incorporated for specific application concerns.
<b>Other:</b>	Basalt woven fiber is an environmentally friendly alternative to fiberglass materials. With excellent tensile strength, excellent resistance to Acid and Alkali, High abrasive resistance and a high melting point. Basalt is made from an igneous rock originated from molten lava and is 100% Recyclable.