
GASKETS, INC.
100% Employee Owned

PHONE:920-992-3127
FAX:920-992-3124
EMAIL:INFO@GASKETSINC.COM

Product Data Sheet — GT22G

Tadpole Types: 1, 2, 3, 8, & 9

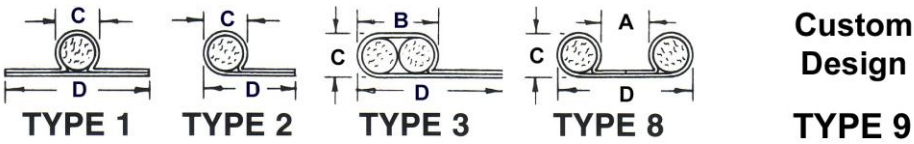

Description Viton® coated fiberglass cover with Galvanized core.

Size: Standard and custom sizes available. See Tadpole Types and potential sizes listed above. Minimum bulb diameter (C) is ¼", Maximum diameter is 3". The minimum overall width (D) is equal to C + ½ inch. There is no (reasonable) overall maximum (D) dimension.

Cover: .080" Thick Viton® 100% Fluoroelastomer coated Fiberglass.

Core: Resilient Galvanized mesh rope core.

Temperature: From 0° to 500° F /32° to 260° C operating range will not become stiff or brittle.

Application: Tadpole seals are used in sealing oven doors, covers, ducts, dampers, panel joints and other applications where conformance to uneven flanges is required. Because Viton® offers excellent resistance to fuel, and hydrocarbon based fluids, it is often the material of choice for use in clean rooms. Viton® does not out-gas and this feature makes it ideal for paint room installations.

Chemical Resistance: Highly resistant to most solvents, acids and fuels. Please consult a chemical resistance guide for a complete list or contact Gaskets, Inc. for application and selection guidance and/or resistance information.