




**Gaskets, Inc.**  
301 W. Hwy. 16  
Rio, WI 53960-0398  
**800-558-1833**  
FAX 920-992-3124  
www.gasketsinc.com  
info@gasketsinc.com

## Product Data Sheet — GT15K

### Tadpole Types: 1, 2, 3, 8, & 9

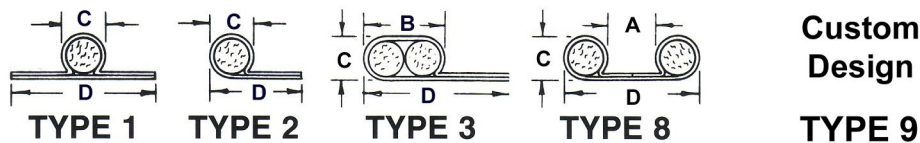

<b>Description:</b>	Kevlar®/Aramid tadpole seal
<b>Size:</b>	Standard and custom sizes available. See Tadpole Types and potential sizes listed above.
<b>Cover:</b>	1/16" Thick Premium quality woven Kevlar®/Aramid Tape.
<b>Core:</b>	Kevlar®/Aramid Rope
<b>Temperature:</b>	500° - (320°) F /216° - (196°) C
<b>Application:</b>	Tadpole seals are used in sealing oven doors, covers, ducts, dampers, panel joints and other applications where conformance to uneven flanges is required.
<b>Chemical Resistance:</b>	Kevlar®/Aramid textiles have excellent resistance to most chemicals. Please call Gaskets Incorporated for specific application concerns.
<b>Other:</b>	Kevlar®/Aramid has excellent mechanical properties being resilient with excellent resistance to thermal shock and vibration. It is used in a variety of industrial and aerospace applications requiring superior temperature and insulation performance. It is uniquely suited for cryogenic use because of its strength in spite of extreme cold conditions.